

The Elite LCD Terminal is the main user interface for the Concept 4000 system. Its stylish design, 20 key backlit keypad and backlit LCD display allows the user to easily perform typical user operations, review system activity and program all options.

The LCD display allows the use of plain text to guide the user through operations and identify alarms, events and items by name.


## Features:

- May be installed as a flush-mount or surface mount unit
- Backlit rubberised keypad provides tactile feedback
- Four LEDs provide area status, door functions, alarms and/or other conditions via programming options
- Instant help text available anytime, at the press of a key
- Four 'arrow' keys provide quick and convenient access to options in the 'spreadsheet' style menu
- Zone inputs and auxiliary outputs provided onboard the Terminal
- Programmable panic key and duress option



## Connectivity

The Elite LCD Terminal is connected directly to the Concept RS485 LAN. Up to 99 Elite LCD Terminals may be installed in a system comprising a single Concept 4000 Control Module.

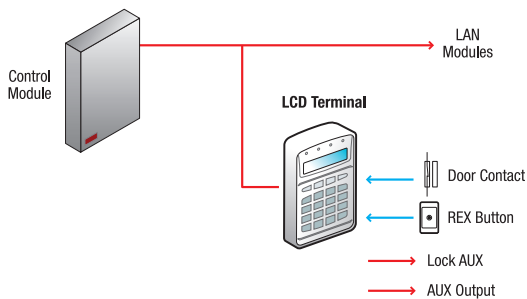

## SPECIFICATIONS

### Physical

Housing Dimensions	143(L) x 89(W) x 18(D) (mm) when flush mounted 143(L) x 89(W) x 28(D) (mm)
Installation Environment	0° - 40°C @ 15% to 85% Relative humidity (non-condensing)

### Electrical

Input Voltage to PCB	11V – 14V DC
Operational Current	Normal – 20mA, Maximum – 45mA
Auxiliary Output Current	100mA maximum each

### Outputs

LED Indicators	4 (not applicable to 993000)
Outputs (open collector)	2

## Ordering options

**995000U** Universal Elite Terminal (ivory)



**995000UWH** Universal Elite Terminal (white)



**993000** Concept 2000/3000 Bi-Lingual Terminal

