

Perfect for home theatre or your media room as main front speakers or side and rear surrounds, the Symmetrix also perform equally well for two-channel stereo, with the ability to produce your favourite album with power and clarity.

The fully enclosed rear cabinet guarantees the best possible bass performance, independent of the shape or size of the wall cavity, and also minimises sound transference into adjoining rooms.

With an effective dual 100mm bass driver design and a 26mm ring radiator tweeter that boasts a wave guide centre plug for controlled directivity, the Symmetrix allows you to experience a well-balanced tonal structure with excellent bass output, all with a depth of clarity unsurpassed in a speaker of this size.

The Symmetrix will fit into a standard 70mm stud wall, allowing 10mm for gyprock depth. Its rust-resistant stainless steel grille is stylish, while its slim bezel design comes in white but can be easily painted to match whatever wall colour you choose, and being magnetic, it's easy to install.

For the ultimate sound experience at home, play it through Krix..


## FEATURES

- Exceptional concealed performance
- Fits inside 70mm wall cavity
- Fully enclosed backbox




Symmetrix	
<b>Frequency Range</b>	55Hz - 40kHz (in room response)
<b>Power Handling</b>	20 - 140 Watts RMS recommended amplifier power
<b>Sensitivity</b>	89dB (2.83V / 1m)
<b>Impedance</b>	Nominal 6 Ohms (minimum 3.5 Ohms)
<b>Configuration</b>	D'Appolito, 2-way
<b>Low Frequency Drivers</b>	2 x nominal 100mm (4") doped paper cones. 25mm (1") voice coil wound on high temperature Kapton former
<b>High Frequency Driver</b>	26mm (1") dual concentric diaphragm with wave-guide centre plug for controlled directivity. Neodymium magnet
<b>Enclosure Type</b>	Bass reflex, front vented
<b>Input Terminals</b>	Gold plated spring terminals
<b>Cut-out Dimensions</b>	555mm x 170mm recommended
<b>Dimensions</b>	596mm high x 211mm wide x 79mm mounting depth
<b>Weight</b>	4kg each


## DETAILED DIMENSIONS



Top View

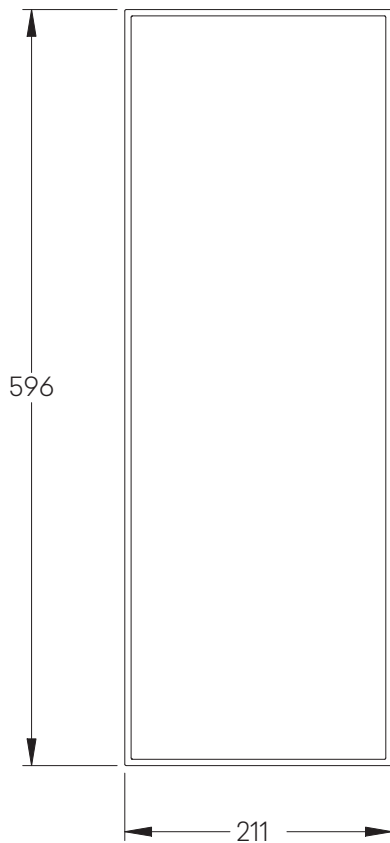

Front View

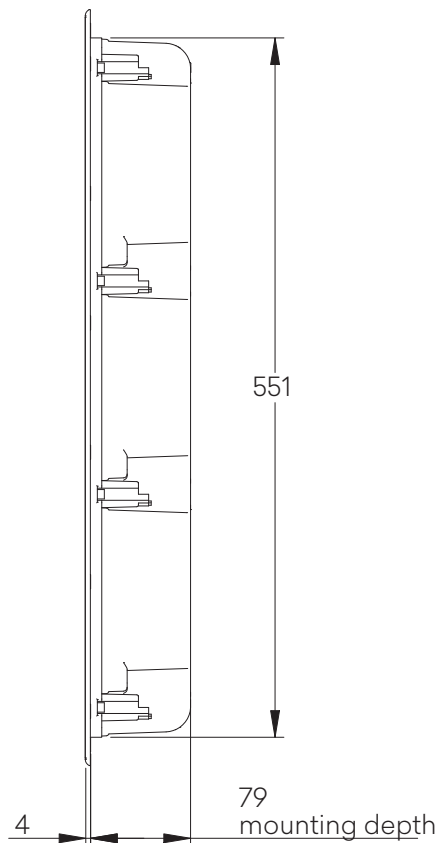

Side View

Binding post hole size -  $\text{Ø} 3.5$ .  
Maximum wire gauge 12 AWG



krix.com



Symmetrix Specifications Sheet-002